



More information on the website  
[radwag.com/en/info,w1,FLR](http://radwag.com/en/info,w1,FLR)

# AK-4.5000.1.5Y Automatic Mass Comparators



The drawings, photos and graphics used are for illustrative purposes only.

## Datasheet

Metrological parameters	
E1	1 kg ÷ 5 kg
E2	1 kg ÷ 5 kg
F1	1 kg ÷ 5 kg
F2	1 kg ÷ 5 kg
Maximum capacity [Max]	5,05 kg
Readability [d]	0,1 mg
Standard repeatability [5% Max]	0,08 mg
Standard repeatability [Max]	0,1 mg
Permissible repeatability	0,15 mg
Eccentricity (tested load)	0 mg
Electric compensation range	-10 g ÷ +50 g
Stabilization time	30 s
Adjustment	external
Physical parameters	
Display	10" touchscreen

Physical parameters	
Weighing pan dimensions	ø75 mm
Weighing device dimensions	350×405×650 mm
Controlling device dimensions	249×170×72 mm
Anti-draft chamber dimensions	660×470×700 mm
Packaging dimensions	1000×900×685 mm
Chamber packaging size	930×750×1000 mm
Net weight	47 kg
Gross weight	61,5 kg
Supplementary weights internal	half automatic
Supplementary weights external	-

Communication interface	
Communication interface	USB-A x2, USB-C, HDMI, Ethernet, Wi-Fi, Hotspot

Electrical parameters	
Power supply	100 – 240 V AC 50/60 Hz

Environmental conditions	
Operating temperature	+15 ÷ +30 °C
Operating temperature change rate	±0,5°C/12h (±0,3°C/4h)
Relative humidity	40% ÷ 60%
Relative humidity change rate	±5%/12h (3%/4h)

Repeatability is expressed as a standard deviation determined for 6 ABBA cycles. Standard deviation is experimentally determined under ambient conditions for calibration of E1 class mass standards specified in OIML R111 (Table C.1.) document.

\* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.

## Accessories

Antivibration Tables  
Barcode scanners  
Protective cover for balances  
RS 232, RS 485 cables


THBR 2.0 System - Ambient Conditions Monitoring  
Receipt Printer  
Fingerprint Reader  
RS 232 cables (scale - printer)

## Software


RAD-KEY  
THB-R

RMCS System


## Device dimensions

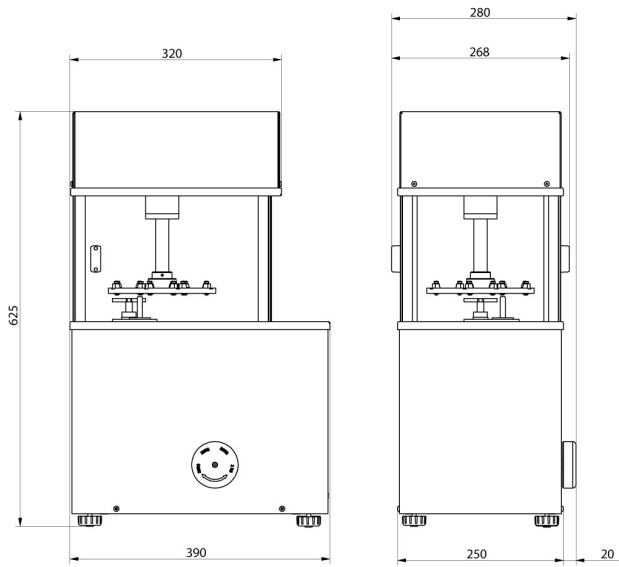

AK-4/100, AK-4/1000,  
AK-4/1000.1

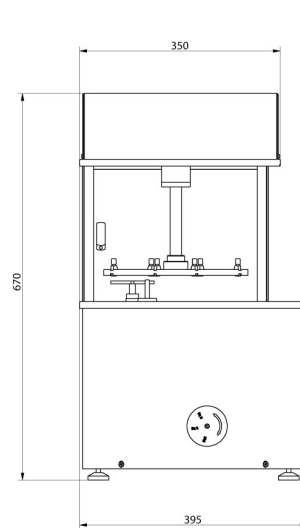

AK-4/2000, AK-4/5000,  
AK-4/5000.1

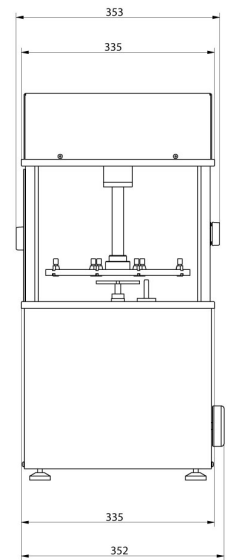

AK-4/10000, AK-4/16000

