



More information on the website  
radwag.com/en/info,w1,CBV


PS 2100.X2.M Precision Balance, PS 3500.X2.M Precision Balance, PS 200/2000.X2 Precision Balance, PS 210.X2 Precision Balance, PS 600.X2 Precision Balance, PS 360.X2 Precision Balance, PS 1000.X2 Precision Balance, PS 3000.X2 Precision Balance, PS 750.X2 Precision Balance



PS 2100.X2.M Precision Balance  
PS 3500.X2.M Precision Balance



PS 200/2000.X2 Precision Balance  
PS 210.X2 Precision Balance  
PS 600.X2 Precision Balance  
PS 360.X2 Precision Balance  
PS 1000.X2 Precision Balance  
PS 750.X2 Precision Balance

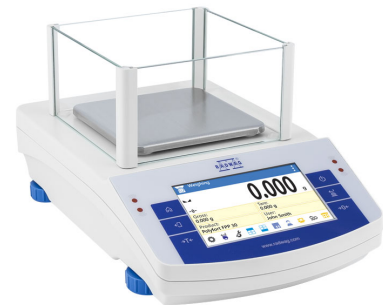

PS 3000.X2 Precision Balance

The drawings, photos and graphics used are for illustrative purposes only.

## Functions



### Autotest:

- PS 210.X2 Precision Balance
- PS 360.X2 Precision Balance
- PS 600.X2 Precision Balance
- PS 750.X2 Precision Balance
- PS 1000.X2 Precision Balance
- PS 2100.X2.M Precision Balance
- PS 3000.X2 Precision Balance
- PS 3500.X2.M Precision Balance



### Dosing:

- PS 210.X2 Precision Balance
- PS 360.X2 Precision Balance
- PS 600.X2 Precision Balance
- PS 750.X2 Precision Balance
- PS 1000.X2 Precision Balance
- PS 2100.X2.M Precision Balance
- PS 3000.X2 Precision Balance
- PS 3500.X2.M Precision Balance



### Percent Weighing:

- PS 210.X2 Precision Balance
- PS 360.X2 Precision Balance
- PS 600.X2 Precision Balance
- PS 750.X2 Precision Balance
- PS 1000.X2 Precision Balance
- PS 2100.X2.M Precision Balance
- PS 3000.X2 Precision Balance
- PS 3500.X2.M Precision Balance



### Parts counting:

- PS 210.X2 Precision Balance
- PS 360.X2 Precision Balance
- PS 600.X2 Precision Balance
- PS 750.X2 Precision Balance
- PS 1000.X2 Precision Balance
- PS 2100.X2.M Precision Balance
- PS 3000.X2 Precision Balance
- PS 3500.X2.M Precision Balance



### Peak hold:

- PS 210.X2 Precision Balance
- PS 360.X2 Precision Balance
- PS 600.X2 Precision Balance
- PS 750.X2 Precision Balance
- PS 1000.X2 Precision Balance
- PS 2100.X2.M Precision Balance
- PS 3000.X2 Precision Balance
- PS 3500.X2.M Precision Balance



### Formulation:

- PS 210.X2 Precision Balance
- PS 360.X2 Precision Balance
- PS 600.X2 Precision Balance
- PS 750.X2 Precision Balance
- PS 1000.X2 Precision Balance
- PS 2100.X2.M Precision Balance
- PS 3000.X2 Precision Balance
- PS 3500.X2.M Precision Balance



### Newton unit measurement:

- PS 210.X2 Precision Balance
- PS 360.X2 Precision Balance
- PS 600.X2 Precision Balance
- PS 750.X2 Precision Balance
- PS 1000.X2 Precision Balance
- PS 2100.X2.M Precision Balance
- PS 3000.X2 Precision Balance
- PS 3500.X2.M Precision Balance



### Statistics:

- PS 210.X2 Precision Balance
- PS 360.X2 Precision Balance
- PS 600.X2 Precision Balance
- PS 750.X2 Precision Balance
- PS 1000.X2 Precision Balance
- PS 2100.X2.M Precision Balance
- PS 3000.X2 Precision Balance
- PS 3500.X2.M Precision Balance



#### Checkweighing:

- PS 210.X2 Precision Balance
- PS 360.X2 Precision Balance
- PS 600.X2 Precision Balance
- PS 750.X2 Precision Balance
- PS 1000.X2 Precision Balance
- PS 2100.X2.M Precision Balance
- PS 3000.X2 Precision Balance
- PS 3500.X2.M Precision Balance



#### IR sensors:

- PS 210.X2 Precision Balance
- PS 360.X2 Precision Balance
- PS 600.X2 Precision Balance
- PS 750.X2 Precision Balance
- PS 1000.X2 Precision Balance
- PS 2100.X2.M Precision Balance
- PS 3000.X2 Precision Balance
- PS 3500.X2.M Precision Balance



#### Under-pan weighing:

- PS 210.X2 Precision Balance
- PS 360.X2 Precision Balance
- PS 600.X2 Precision Balance
- PS 750.X2 Precision Balance
- PS 1000.X2 Precision Balance
- PS 2100.X2.M Precision Balance
- PS 3000.X2 Precision Balance
- PS 3500.X2.M Precision Balance



#### GLP Procedures:

- PS 210.X2 Precision Balance
- PS 360.X2 Precision Balance
- PS 600.X2 Precision Balance
- PS 750.X2 Precision Balance
- PS 1000.X2 Precision Balance
- PS 2100.X2.M Precision Balance
- PS 3000.X2 Precision Balance
- PS 3500.X2.M Precision Balance



#### Animal weighing:

- PS 210.X2 Precision Balance
- PS 360.X2 Precision Balance
- PS 600.X2 Precision Balance
- PS 750.X2 Precision Balance
- PS 1000.X2 Precision Balance
- PS 2100.X2.M Precision Balance
- PS 3000.X2 Precision Balance
- PS 3500.X2.M Precision Balance



#### Density determination:

- PS 210.X2 Precision Balance
- PS 360.X2 Precision Balance
- PS 600.X2 Precision Balance
- PS 750.X2 Precision Balance
- PS 1000.X2 Precision Balance
- PS 2100.X2.M Precision Balance
- PS 3000.X2 Precision Balance
- PS 3500.X2.M Precision Balance



#### Ambient conditions monitoring:

- PS 210.X2 Precision Balance
- PS 360.X2 Precision Balance
- PS 600.X2 Precision Balance
- PS 750.X2 Precision Balance
- PS 1000.X2 Precision Balance
- PS 2100.X2.M Precision Balance
- PS 3000.X2 Precision Balance
- PS 3500.X2.M Precision Balance



#### Replaceable unit:

- PS 210.X2 Precision Balance
- PS 360.X2 Precision Balance
- PS 600.X2 Precision Balance
- PS 750.X2 Precision Balance
- PS 1000.X2 Precision Balance
- PS 2100.X2.M Precision Balance
- PS 3000.X2 Precision Balance
- PS 3500.X2.M Precision Balance



#### Statistical Quality Control:

- PS 210.X2 Precision Balance
- PS 360.X2 Precision Balance
- PS 600.X2 Precision Balance
- PS 750.X2 Precision Balance
- PS 1000.X2 Precision Balance
- PS 2100.X2.M Precision Balance
- PS 3000.X2 Precision Balance
- PS 3500.X2.M Precision Balance



#### ALIBI Memory:

- PS 210.X2 Precision Balance
- PS 360.X2 Precision Balance
- PS 600.X2 Precision Balance
- PS 750.X2 Precision Balance
- PS 1000.X2 Precision Balance
- PS 2100.X2.M Precision Balance
- PS 3000.X2 Precision Balance
- PS 3500.X2.M Precision Balance



#### Mass for titrator:

- PS 210.X2 Precision Balance
- PS 360.X2 Precision Balance
- PS 600.X2 Precision Balance
- PS 750.X2 Precision Balance
- PS 1000.X2 Precision Balance
- PS 2100.X2.M Precision Balance
- PS 3000.X2 Precision Balance
- PS 3500.X2.M Precision Balance



#### Wi-Fi:

- PS 210.X2 Precision Balance
- PS 360.X2 Precision Balance
- PS 600.X2 Precision Balance
- PS 750.X2 Precision Balance
- PS 1000.X2 Precision Balance
- PS 2100.X2.M Precision Balance
- PS 3000.X2 Precision Balance
- PS 3500.X2.M Precision Balance

# Datasheet

	PS 200/2000.X2 Precision Balance	PS 210.X2 Precision Balance	PS 360.X2 Precision Balance
<b>Metrological parameters</b>			
<b>Maximum capacity [Max]</b>	200 / 2000 g	210 g	360 g
<b>Minimum load</b>	20 mg	20 mg	20 mg
<b>Readability [d]</b>	1 / 10 mg	1 mg	1 mg
<b>Verification unit [e]</b>	10 / 100 mg	10 mg	10 mg
<b>Tare range</b>	-2000 g	-210 g	-360 g
<b>Standard repeatability [5% Max]</b>	0,5 / 5 mg	0,5 mg	0,5 mg
<b>Standard repeatability [Max]</b>	1 / 10 mg	1 mg	1 mg
<b>Standard minimum weight (USP)</b>	1 g	1 g	1 g
<b>Standard minimum weight (U=1%, k=2)</b>	0,1 g	0,1 g	0,1 g
<b>Linearity</b>	±2 / 20 mg	±2 mg	±2 mg
<b>Stabilization time</b>	2 / 1,5 s	2 s	2 s
<b>Adjustment</b>	internal (automatic)	internal (automatic)	internal (automatic)
<b>OIML Class</b>	II	II	II
<b>Physical parameters</b>			
<b>Leveling system</b>	manual	manual	manual
<b>Display</b>	5" graphic color touchscreen	5" graphic color touchscreen	5" graphic color touchscreen
<b>Delivery components</b>	Balance, weighing pan, weighing pan shield, grounding bumper ×1, bumper ×3, power supply.	Balance, weighing pan, weighing pan shield, grounding bumper ×1, bumper ×3, power supply.	Balance, weighing pan, weighing pan shield, grounding bumper ×1, bumper ×3, power supply.
<b>Weighing pan dimensions</b>	128×128 mm	128×128 mm	128×128 mm
<b>Packaging dimensions</b>	475×380×345 mm	475×380×345 mm	475×380×345 mm
<b>Net weight</b>	4,33 kg	3,54 kg	3,99 kg
<b>Gross weight</b>	5,5 kg	5 kg	5 kg
<b>Construction</b>			
<b>Protection class</b>	IP 43	IP 43	IP 43
<b>Components and software</b>			
<b>Database capacity</b>	7	7	7
<b>Features of use</b>			
<b>Touch-free operation</b>	2 IR Sensors	2 IR Sensors	2 IR Sensors
<b>Communication interface</b>			
<b>Communication interface</b>	2×RS232 <sup>1</sup> , USB-A, USB-B, Ethernet, Wi-Fi	2×RS232 <sup>1</sup> , USB-A, USB-B, Ethernet, Wi-Fi	2×RS232 <sup>1</sup> , USB-A, USB-B, Ethernet, Wi-Fi
<b>Electrical parameters</b>			
<b>Power supply</b>	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,8A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,8A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,8A max
<b>Power consumption</b>	4 W	4 W	4 W
<b>Environmental conditions</b>			
<b>Operating temperature</b>	+10 ÷ +40 °C	+10 ÷ +40 °C	+10 ÷ +40 °C
<b>Ambient conditions monitoring</b>	THBR 2.0 System, THBR BOX, THB P, THB W, THB S	THBR 2.0 System, THBR BOX, THB P, THB W, THB S	THBR 2.0 System, THBR BOX, THB P, THB W, THB S

Repeatability is expressed as a standard deviation from 10 weighing cycles. Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile. 1 Barcode scanners, available as weighing instrument accessory, communicate with the instrument via RS232 interface exclusively.

# Datasheet

	PS 600.X2 Precision Balance	PS 750.X2 Precision Balance	PS 1000.X2 Precision Balance
<b>Metrological parameters</b>			
<b>Maximum capacity [Max]</b>	600 g	750 g	1000 g
<b>Minimum load</b>	20 mg	20 mg	20 mg
<b>Readability [d]</b>	1 mg	1 mg	1 mg
<b>Verification unit [e]</b>	10 mg	10 mg	10 mg
<b>Tare range</b>	-600 g	-750 g	-1000 g
<b>Standard repeatability [5% Max]</b>	0,5 mg	0,5 mg	0,5 mg
<b>Standard repeatability [Max]</b>	1,5 mg	1,5 mg	1,5 mg
<b>Standard minimum weight (USP)</b>	1 g	1 g	1 g
<b>Standard minimum weight (U=1%, k=2)</b>	0,1 g	0,1 g	0,1 g
<b>Linearity</b>	±3 mg	±3 mg	±3 mg
<b>Stabilization time</b>	2 s	2 s	2 s
<b>Adjustment</b>	internal (automatic)	internal (automatic)	internal (automatic)
<b>OIML Class</b>	II	II	II
<b>Physical parameters</b>			
<b>Leveling system</b>	manual	manual	manual
<b>Display</b>	5" graphic color touchscreen	5" graphic color touchscreen	5" graphic color touchscreen
<b>Delivery components</b>	Balance, weighing pan, weighing pan shield, grounding bumper x1, bumper x3, power supply.	Balance, weighing pan, weighing pan shield, grounding bumper x1, bumper x3, power supply.	Balance, weighing pan, weighing pan shield, grounding bumper x1, bumper x3, power supply.
<b>Weighing pan dimensions</b>	128×128 mm	128×128 mm	128×128 mm
<b>Packaging dimensions</b>	475×380×345 mm	475×380×345 mm	475×380×345 mm
<b>Net weight</b>	3,99 kg	3,9 kg	4,01 kg
<b>Gross weight</b>	5,5 kg	5 kg	5 kg
<b>Construction</b>			
<b>Protection class</b>	IP 43	IP 43	IP 43
<b>Components and software</b>			
<b>Database capacity</b>	7	7	7
<b>Features of use</b>			
<b>Touch-free operation</b>	2 IR Sensors	2 IR Sensors	2 IR Sensors
<b>Communication interface</b>			
<b>Communication interface</b>	2×RS232 <sup>1</sup> , USB-A, USB-B, Ethernet, Wi-Fi	2×RS232 <sup>1</sup> , USB-A, USB-B, Ethernet, Wi-Fi	2×RS232 <sup>1</sup> , USB-A, USB-B, Ethernet, Wi-Fi
<b>Electrical parameters</b>			
<b>Power supply</b>	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,8A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,8A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,8A max
<b>Power consumption</b>	4 W	4 W	4 W
<b>Environmental conditions</b>			
<b>Operating temperature</b>	+10 ÷ +40 °C	+10 ÷ +40 °C	+10 ÷ +40 °C
<b>Ambient conditions monitoring</b>	THBR 2.0 System, THBR BOX, THB P, THB W, THB S	THBR 2.0 System, THBR BOX, THB P, THB W, THB S	THBR 2.0 System, THBR BOX, THB P, THB W, THB S

Repeatability is expressed as a standard deviation from 10 weighing cycles. Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile. 1 Barcode scanners, available as weighing instrument accessory, communicate with the instrument via RS232 interface exclusively.

# Datasheet

	PS 2100.X2.M Precision Balance	PS 3000.X2 Precision Balance	PS 3500.X2.M Precision Balance
<b>Metrological parameters</b>			
<b>Maximum capacity [Max]</b>	2100 g	3000 g	3500 g
<b>Minimum load</b>	500 mg	-	500 mg
<b>Readability [d]</b>	10 mg	1 mg	10 mg
<b>Verification unit [e]</b>	100 mg	-	100 mg
<b>Tare range</b>	-2100 g	-3000 g	-3500 g
<b>Standard repeatability [5% Max]</b>	5 mg	0,5 mg	5 mg
<b>Standard repeatability [Max]</b>	8 mg	1,5 mg	8 mg
<b>Standard minimum weight (USP)</b>	10 g	1 g	10 g
<b>Standard minimum weight (U=1%, k=2)</b>	1 g	0,1 g	1 g
<b>Linearity</b>	±20 mg	±6 mg	±20 mg
<b>Stabilization time</b>	1,5 s	3 s	1,5 s
<b>Adjustment</b>	internal (automatic)	internal (automatic)	internal (automatic)
<b>OIML Class</b>	II	-	II
<b>Physical parameters</b>			
<b>Leveling system</b>	manual	manual	manual
<b>Display</b>	5" graphic color touchscreen	5" graphic color touchscreen	5" graphic color touchscreen
<b>Delivery components</b>	Balance, weighing pan, weighing pan shield, power supply	Balance, weighing pan, weighing pan shield, grounding bumper x1, bumper x3, power supply.	Balance, weighing pan, weighing pan shield, power supply
<b>Weighing pan dimensions</b>	195×195 mm	128×128 mm	195×195 mm
<b>Packaging dimensions</b>	475×380×345 mm	475×380×345 mm	475×380×345 mm
<b>Net weight</b>	4,33 kg	4,33 kg	4,33 kg
<b>Gross weight</b>	5,5 kg	5,5 kg	5,5 kg
<b>Construction</b>			
<b>Protection class</b>	IP 43	IP 43	IP 43
<b>Components and software</b>			
<b>Database capacity</b>	7	7	7
<b>Features of use</b>			
<b>Touch-free operation</b>	2 IR Sensors	2 IR Sensors	2 IR Sensors
<b>Communication interface</b>			
<b>Communication interface</b>	2×RS232 <sup>1</sup> , USB-A, USB-B, Ethernet, Wi-Fi	2×RS232 <sup>1</sup> , USB-A, USB-B, Ethernet, Wi-Fi	2×RS232 <sup>1</sup> , USB-A, USB-B, Ethernet, Wi-Fi
<b>Electrical parameters</b>			
<b>Power supply</b>	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,8A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,8A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,8A max
<b>Power consumption</b>	4 W	4 W	4 W
<b>Environmental conditions</b>			
<b>Operating temperature</b>	+10 ÷ +40 °C	+10 ÷ +40 °C	+10 ÷ +40 °C
<b>Ambient conditions monitoring</b>	THBR 2.0 System, THBR BOX, THB P, THB W, THB S	THBR 2.0 System, THBR BOX, THB P, THB W, THB S	THBR 2.0 System, THBR BOX, THB P, THB W, THB S

Repeatability is expressed as a standard deviation from 10 weighing cycles. Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile. 1 Barcode scanners, available as weighing instrument accessory, communicate with the instrument via RS232 interface exclusively.

\* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.

## Accessories

Balance Storage Case  
Antivibration Tables  
Power Adapters  
Cigarette lighter receptacle power supply cables  
USB cable (scale - printer)  
Density determination KIT  
Barcode scanners  
Anti-Draft Chamber for Balances with a 128×128 mm Weighing Pan  
RS 232, RS 485 cables  
THBR 2.0 System - Ambient Conditions Monitoring

Displays  
Draft Shield  
Receipt Printer  
Protective cover for balances  
RS 232, RS 485 cables  
Additional modules  
Protective cover for balances  
Under-pan weighing  
RS 232 cables (scale - printer)  
RS 232 – RS 485 Converter



## Software

RAD-KEY  
R-LAB  
RADWAG Development Studio

Alibi Reader  
Scales Editor 2.1

## Device dimensions

PS 2100.X2.M Precision Balance, PS 3500.X2.M Precision Balance

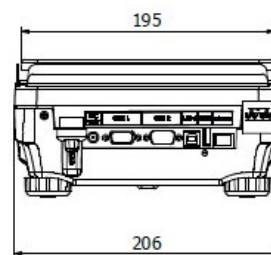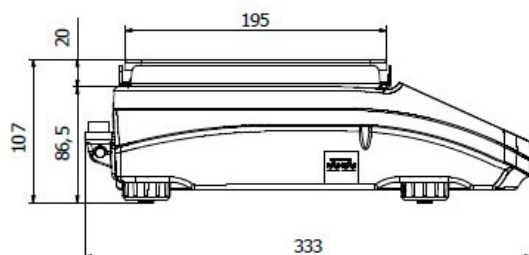

PS 200/2000.X2 Precision Balance, PS 210.X2 Precision Balance, PS 600.X2 Precision Balance, PS 360.X2 Precision Balance, PS 750.X2 Precision Balance

