



More information on the website
radwag.com/en/info,w1,ZB0

UMA 1000.5Y Automatic Mass Comparator



UMA 1000.5Y Automatic Mass Comparator

The drawings, photos and graphics used are for illustrative purposes only.

Datasheet

	UMA 1000.5Y Automatic Mass Comparator
Metrological parameters	
E1 Calibration Range	100 g ÷ 1000 g
E2 Calibration Range	10 g ÷ 1000 g
F1 Calibration Range	10 g ÷ 1000 g
F2 Calibration Range	10 g ÷ 1000 g
Maximum capacity [Max]	1060 g
Readability [d]	0,005 mg
Standard repeatability [5% Max]	8 µg
Standard repeatability [Max]	12 µg
Permissible repeatability	20 µg
Eccentricity (tested load)	—
Electric compensation range	-10 g ÷ +60 g
Stabilization time	30 s
Adjustment	external
Physical parameters	
Display	10" touchscreen
Magazine positions	18
Weighing pan dimensions	ø48 mm
Weighing device dimensions	700×585×720 mm
Controlling device dimensions	460×250×195 mm
Packaging dimensions	1200×1000×1200 mm
Net weight	116 kg
Gross weight	206 kg
Communication interface	
Communication interface	USB-A ×2, USB-C, HDMI, Ethernet, Wi-Fi, Hotspot
Electrical parameters	
Power supply	100 – 240 V AC 50/60 Hz
Environmental conditions	
Operating temperature	+15 ÷ +30 °C
Operating temperature change rate	±0,5°C/12h (±0,3°C/4h)
Relative humidity change rate	±5%/12h (3%/4h)

Repeatability is expressed as a standard deviation determined for 6 ABBA cycles. Standard deviation is experimentally determined under ambient conditions for calibration of E1 class mass standards specified in OIML R111 (Table C.1.) document.

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.

Accessories

RFID Tags
Antivibration Tables
Additional modules
Protective cover for balances
Barcode scanners
RS 232, RS 485 cables

THBR 2.0 System - Ambient Conditions Monitoring
Receipt Printer
Fingerprint Reader
RS 232, RS 485 cables
RS 232 cables (scale - printer)


Software

RAD-KEY
RMCS System

RMCS Lite


Device dimensions

UMA 1000.5Y Automatic Mass Comparator

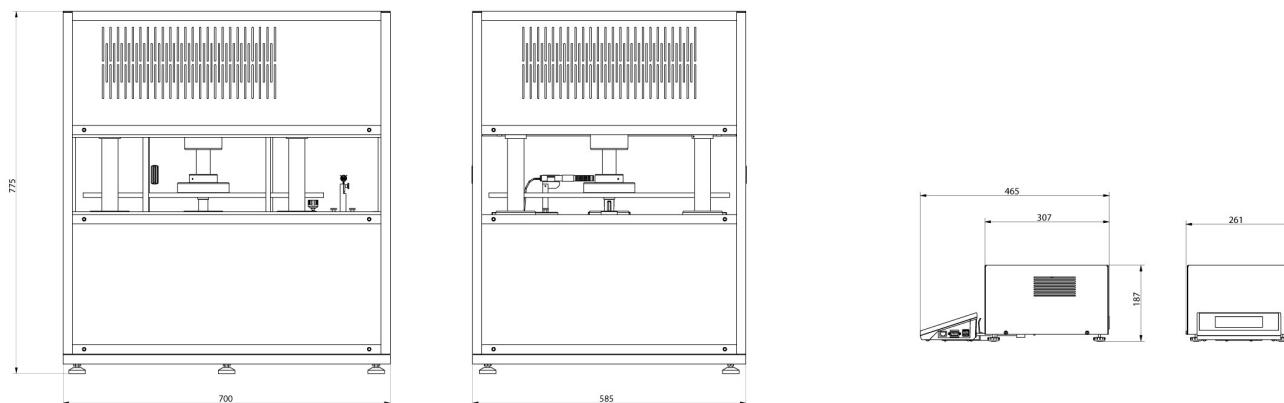

UMA-100, UMA-1000

UMA-control unit

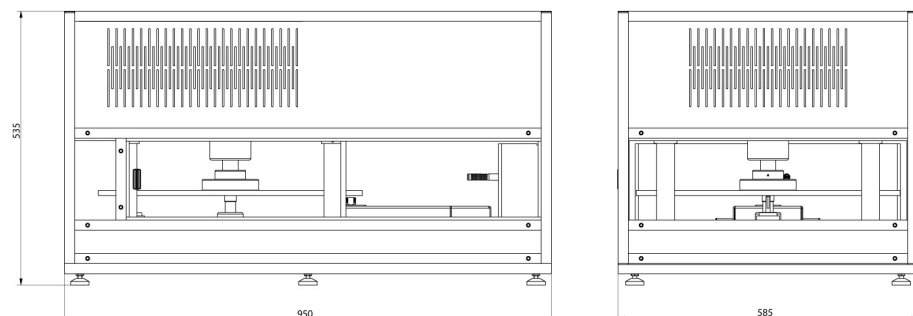

UMA-5